



Non-Clog Submersible pump

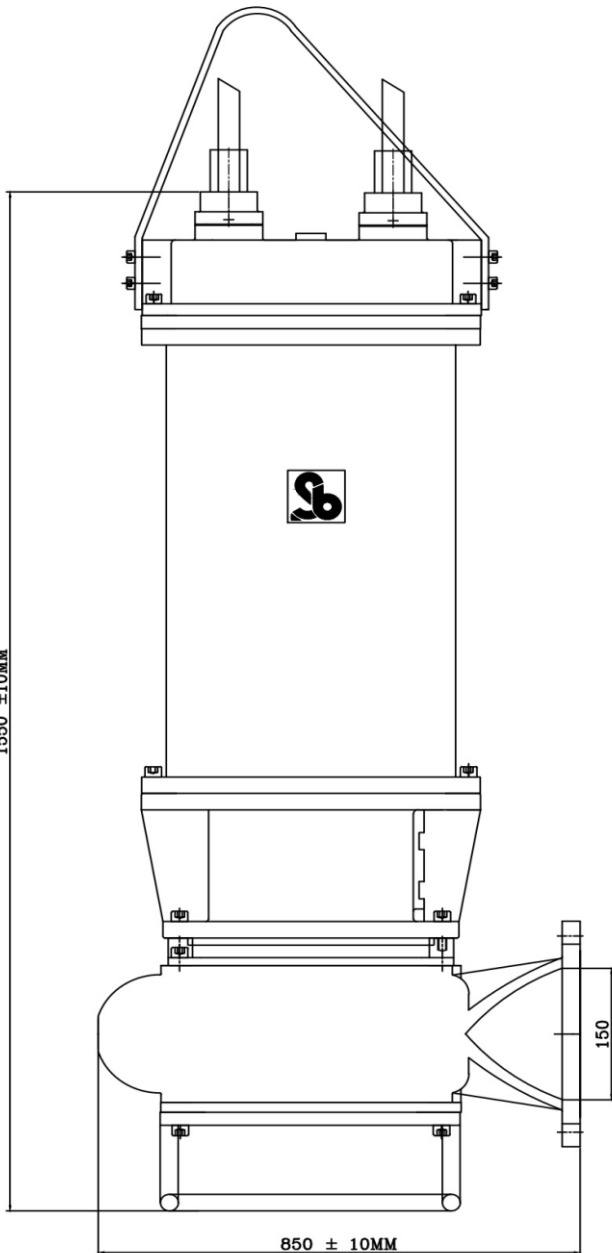

Series	Model	HP /kw	Outlet size in MM
200-400N	SBNC1508	150/ 112	150

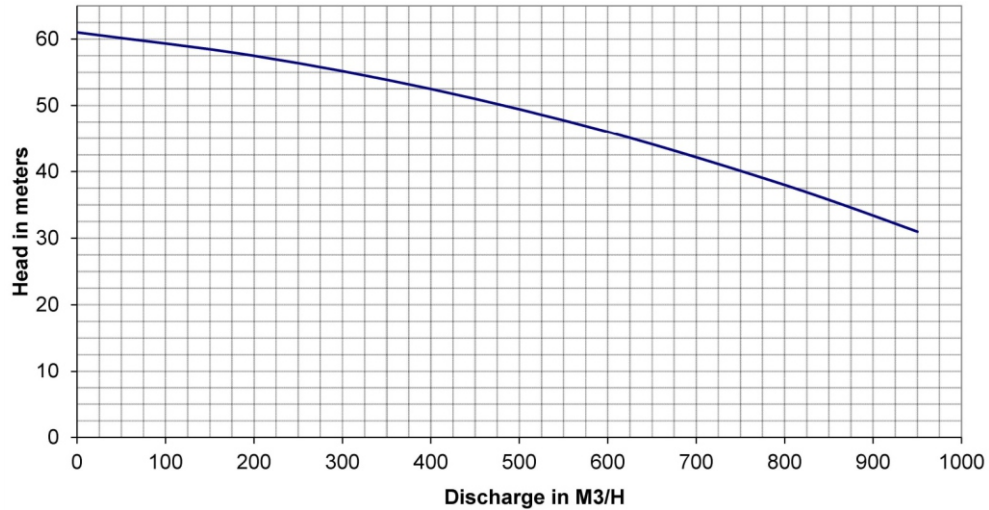

Pump type	Non-Clog Submersible pump	
Motor	Type	Induction Motor
	Poles	4
	Insulation	Class F (H on request)
	Starting Method	Star-Delta
	Volts	415 +-10%
	Phase	3
	Protection	IP68
	Speed	1450
Lubricants Bearings		Grease
Lubricants Seals		Food Grade Oil
Mechanical Seal	Double	Silicon Vs Silicon
Liquid Density		1050 Kg/Ltr.
Solid Size in MM	Max.	80
Ph Ranges		5 to 8
Cable	Double Sheathed copper 10 Mtr. Extra Length on request.	
Max. Submergence		20 Mtr.
Mini.Submergence	0.5Mtr. Below water level.	
Max.liquid Temp		45 Deg. Centi.
Material of Construction	Impeller	Cast Iron Grd 260
	Housings	Cast Iron Grd 260
	Stator Body	Cast Iron Grd 260
	Rotor Shaft	SS431
	Rubber Parts	Nitrile Rubber
	Hardware	Stainless Steel

*Flange Standard as Per Standard drilling to IS 639 2 table 15.
Due to continuous product development, specifications are subject to change without notice