



SB Pumps
The Pump People



LIGERO SERIES

Dewatering Submersible Pump

PORTABLE, TOUGH & COMPACT DESIGN
To Handle Muddy Water from Mines, Pits &
Dewatering.



TYPE

LIGERO - 4


SERIES

DEW4-G006TH+

MODEL



SBDWL306

www.sbpumpsindia.com

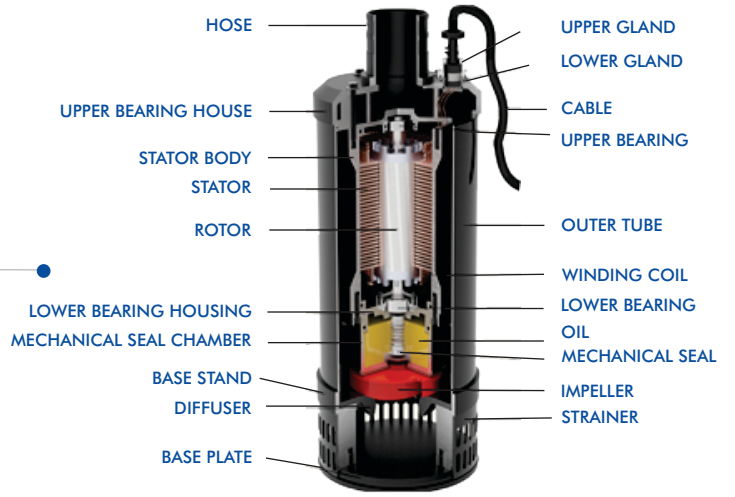

Series	Model	HP /kw	Outlet size in MM
DEW4-G006TH+	SBDWL306	30 / 22	150

Performance Curve Dewatering submersible pump

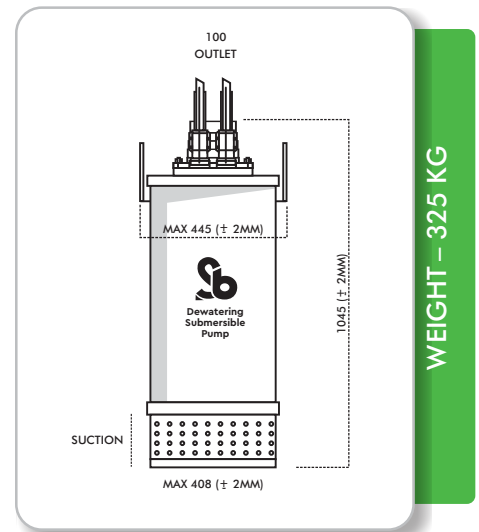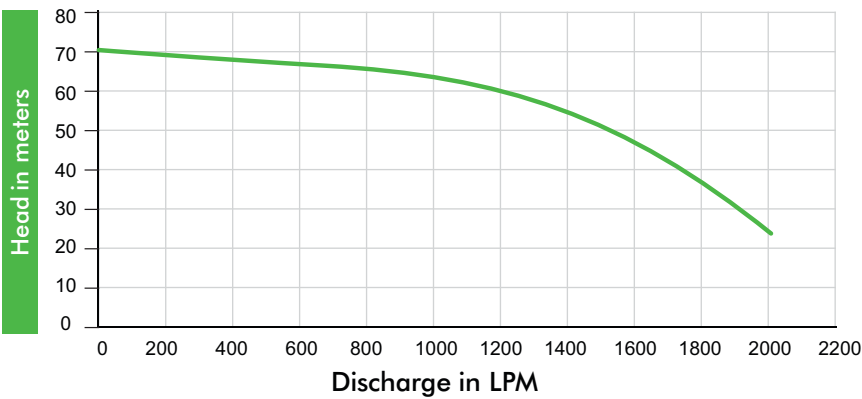

WEIGHT – 325 KG

- *Inbuilt Thermal Protection
- *Outlet NPT/ Flange / Slip on Hose
- Due to continuous product development, specifications are subject to change without notice
- *Other Material of Construction on Request.

Pump type	Submersible Dewatering Pump	
Motor	Type	Induction Motor
	Poles	2
	Insulation	F Class (H On request)
	Starting Method	DOL /*STAR DELTA (Optional)
	Volts	415 +-10%
	Phase	3
	Protection	IP68
	Speed	2850
	Lubricants Bearings	Grease
Lubricants Seals	Food Grade Oil	
Mechanical Seal	Double	Silicon Vs Silicon
Liquid Density	1050 Kg/Ltr	
Solid Size in MM	Max.	10

Pump type	Submersible Dewatering Pump	
Ph Ranges	5 to 8	
Cable	Double Sheathed copper 20 Mtr. 4C x 16 Sq.mm	
Max. Submergence	20 Mtr.	
Mini.Submergence	Upto suction strainer	
Max.liquid Temp	45 Deg. Centi.	
Material of Construction	Impeller	SS410 Hardend 55HRC
	Housings	Cast Iron Grd. Fg 260
	Stator Body	Cast Iron Grd. Fg 260
	Outer Body	Epoxy coated Steel
	Rotor Shaft	SS431
	Rubber Parts	Nitrile Rubber
Hardware	SS304	



SB Pump Industries

HEAD OFFICE

- Plot No.30 Industrial Area Richhai Jabalpur, MP (482010)- INDIA
- +91 761 2330221
- info@sbpumpsindia.com
- www.sbpumpsindia.com

REGIONAL OFFICES

- Diviya Residency 402, D Block, 4th Floor, Manmohan Charasta, Nikol, Ahmedabad - 382350 - Gujarat.
- +91 6260290884
- 101, Building No 5.shreeji Splendor, Brahmand Phase 7, Thane West - 400607 - Maharashtra.
- +91 9920834034