



SB Pumps
The Pump People



LIGERO SERIES

Dewatering Submersible Pump

PORTABLE, TOUGH & COMPACT DESIGN
To Handle Muddy Water from Mines, Pits &
Dewatering.



TYPE

LIGERO-1



SERIES

DEW1-20M

MODEL

SBDWL 1.52

www.sbpumpsindia.com

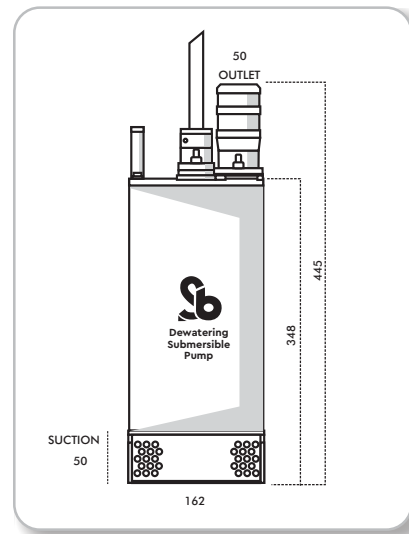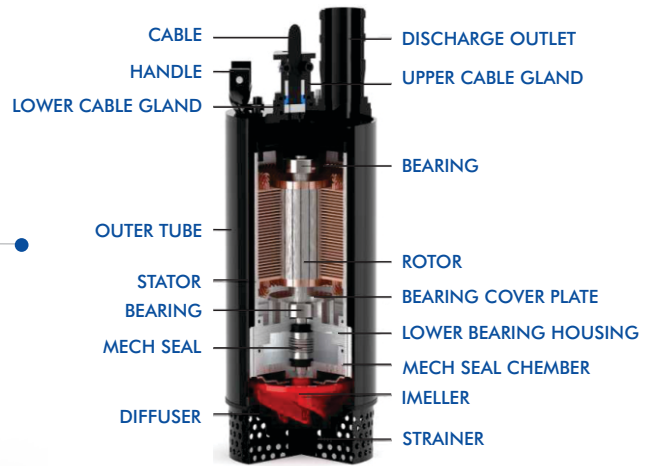


WEIGHT – 18 KG

Series	Model	HP /kw	Outlet size in MM
--------	-------	--------	-------------------

Dew 1 – 20M SBDWL 1.52 1.5 / 1.1 50

Performance Curve Dewatering submersible pump

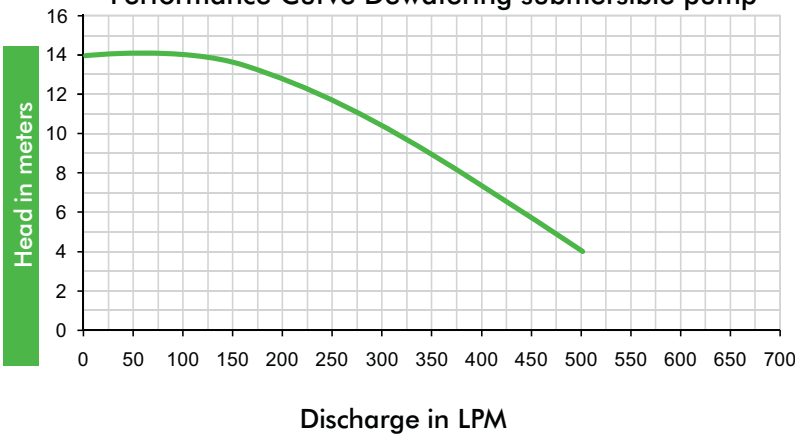

*Inbuilt Thermal Protection
 *Outlet NPT/ Flange / Slip on Hose
 Due to continuous product development, specifications are subject to change without notice
 *Other Material of Construction on Request.

Pump type	Submersible Dewatering Pump	
Motor	Type	Induction Motor
	Poles	2
	Insulation	F Class (H On request)
	Starting Method	DOL
	Volts	240 / 415 +-10%
	Phase	1 / 3
	Protection	IP68
	Speed	2850
Lubricants Bearings	Grease	
Lubricants Seals	Food Grade Oil	
Mechanical Seal	Double	Silicon Vs Silicon
Liquid Density	1050 Kg/Ltr	
Solid Size in MM	Max.	5

Pump type	Submersible Dewatering Pump	
Ph Ranges	5 to 8	
Cable	Double Sheathed copper 10 Mtr. Extra on request.	
Max. Submergence	10 Mtr.	
Mini.Submergence	Upto suction strainer	
Max.liquid Temp	45 Deg. Centi.	
Material of Construction	Impeller	SS410
	Housings	Alluminium Alloy
	Stator Body	Alluminium Alloy
	Outer Body	Stainless Steel
	Rotor Shaft	SS431
	Rubber Parts	Nitrile Rubber
Hardware	Stainless Steel	



SB Pump Industries

HEAD OFFICE

Plot No.30 Industrial Area
 Richhai Jabalpur,
 MP (482010)- INDIA
 +91 761 2330221
 info@sbpumpsindia.com
 www.sbpumpsindia.com

REGIONAL OFFICES

Diviya Residency 402, D Block, 4th Floor,
 Manmohan Charasta, Nikol,
 Ahmedabad - 382350 - Gujarat.
 +91 6260290884
 101, Building No 5.shreeji Splendor,
 Brahmand Phase 7,
 Thane West - 400607 - Maharashtra.
 +91 9920834034